

PRODUCT SPECIFICATION

PTI-0667-3
ADAPTER, USB - DUAL

REV: -

2015-Oct-25

TYPE: Charger

- - -


Scope Of Work

To establish and produce a charging station with a Dual USB output to be used with Lithium-ion Battery (p/n: PTI-0660-3).


Specifications

- Input Voltage: 6 – 24 V
- Input Connector: AMP Superseal 1.5 SRS, 2-Pos, Pin
- Output Voltage: 5 V
- Output Current: 2.1 A
- Output Connector: 2X USB 2.0 type
- Converter Type: DC Buck Step Down
- Ruggedized design (oil/water resistance)
- Class IP65 (watertight and resistance)
- Temperature Range: Operating -20°C to +60°C, Storage -33°C to +70°C

Pictures

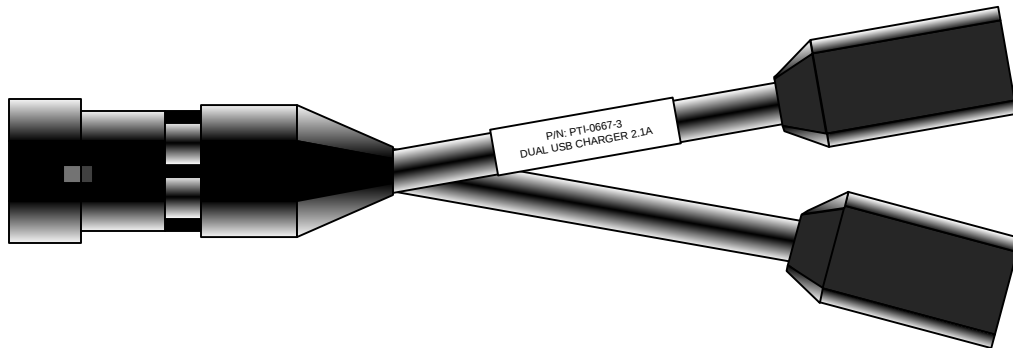

Case Weight & Dimensions

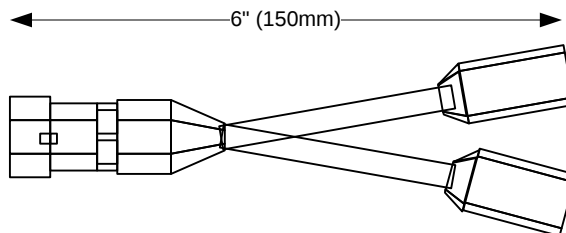

Weight: 25 gram

Used with Li-Ion Battery: PTI-0660-3



Prob-Test, Inc. Opto-Electronics Manufacturing
364 W. Tullock St. | Rialto, CA 92376 | Tel: 909.421.4444 | Fax: 909.421.4440 | www.probtest.com