

PRODUCT SPECIFICATION

PTI-0710-X
MILES Controller Device, Key Fob

REV: -

2015-NOV-05

TYPE: Encoder

- - -

Scope Of Work

Used as rugged encoder device with four (4) programmable functions for MILES (Multiple Integrated Laser Engagement System) equipment.

Specifications

- 4-Programmable Push-Buttons
- Compatible with MCC Standard PMT 90-S002M protocol
- Embedded Red Laser Pointer and LED Flashlight
- MILES Laser Class I, Red Laser Pointer Class IIIa
- Protective Rail Guard for all switches
- T6-6061 (aircraft alloy) aluminum enclosure housing
- Ruggedized design to withstand harsh military training environment
- Class IP65 (watertight and resistance)
- Temp. Range: Operating -20°C to +60°C, Storage -33°C to +70°C

Part Number

Switches	PTI-0710-1 MILES	PTI-0710-2 SAAB/IWS
Top/Left	Resurrect	Test
Top/Right	Near Miss	Near Miss
Mid/Left	Reset	Reset
Mid/Right	Kill (Universal)	Kill (Universal)
Low/Left	Flashlight	Flashlight
Low/Right	Red Laser Pointer	Red Laser Pointer

Pictures



Side View




Front View




Back View

Case Weight & Dimensions

Length: 4.40" (112 mm)
Width: 1.39" (35 mm)
Height: .73" (18.5 mm)

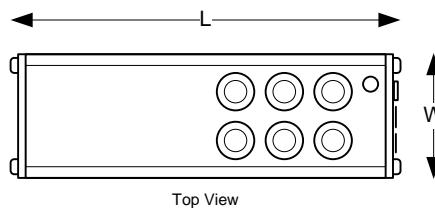

Top View



Front View

Weight: 0.265lb (120 gram)
Battery: 9V Alkaline (6LR61)

